

## Notes:

o/ A classic Golden Ratio based derivative of the Mar-Ken10.2 designed for modified Mark Audio Alpair 10.2, will work well with stock driver 1/ to be built as mirror imaged pairs – drivers are mounted off-centre (based on the golden ratio) 2/ All panels 18mm

2/ All panels 18mm 3/ Vents are 15mm high, vent spacer is 30mm wide and centrally located 4/ brace shape is only suggestive – prime purpose is to brace driver, it needs to be about 35-40% holes. (ie if you have to mount a terminal cup in the middle, you'll want to make sure the brace allows clearance), this centrally mounted on the driver magnet.


you'll want to make sure the brace allows clearance), it is centrally mounted on the driver magnet 5/ Don't forget to angle cut the back of the driver cut-out to give it breathing room 6/ All internal panels lined with ~1/2" (12mm) cotton or wool felt (preferred), 3/4" (19mm) poly-fluff batting, or 1" (25mm) fiberglass Note that it is hard to get into the box after it is sealed up (means to principle and to be colderable from cut-ide the box terminals need to be solderable from outside the box as well)



## Classic GR Mar-Ken10.2 2vo.1

Mark Audio Alpair 10.2 © 2011, 2012 planet\_10 enterprises limited

26- june-2012 designed & drawn by dld free for non-commercial use only

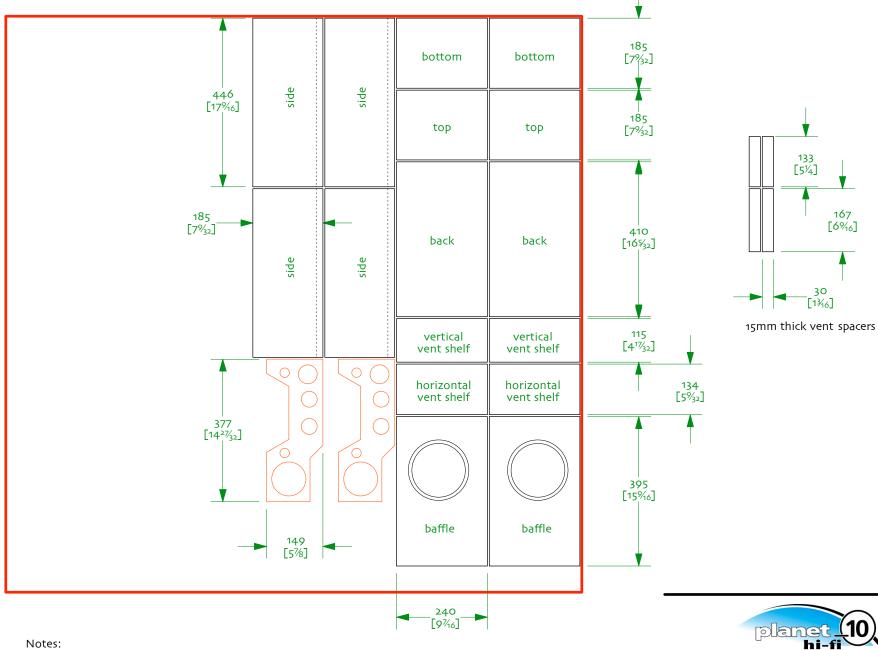

o/ 5' x 5' sheet 1/ 5mm trim & kerf allowance

## Classic GR Mar-Ken10.2 2vo.1

Mark Audio Alpair 10.2 © 2011, 2012 planet\_10 enterprises limited 26- june-2012 | designed & drawn by dld foree for non-commercial use only use only